

B20S


Compact easy to use thermal imaging camera for daily operation



SuperIR


Enhanced Thermal Clarity with SuperIR

HIKMICRO's SuperIR image enhancement technology upscales the resolution of captured thermal images to 640 x 480 (307,200 pixels), significantly improving thermal image quality. It also provides a smooth 25 Hz image frequency for live viewing and photo capture.

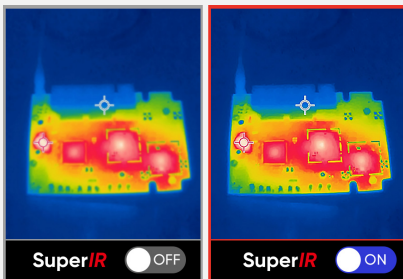


Multiple Image Modes

Fusion, Thermal, PIP and Visual modes to suit your preferred view.

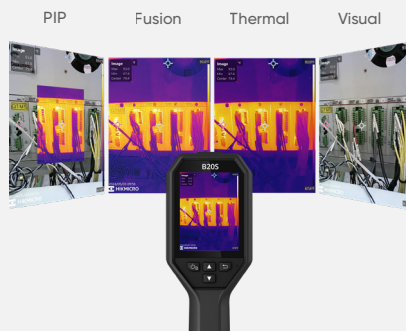

Innovative Macro Mode

Using a clip-on macro lens, the B20S cameras can see details as small as 500 microns and allow you to take accurate temperature readings on small objects, such as components on printed circuit boards or assemblies.

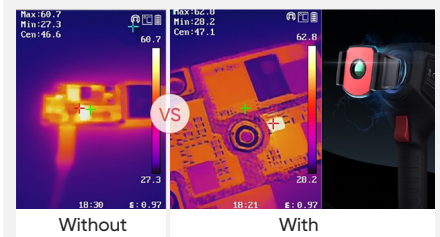

3.2" Color LCD

View the details of your images on the large, class-leading LCD screen.



Efficient Temperature Measurement


Track the temperature of Center, Hot, Cold spot and 3 Custom spots automatically.




Wi-Fi Connectivity

Connect to mobile devices via built-in Wi-Fi and the HIKMICRO Viewer App to quickly share your images.


APPLICATIONS

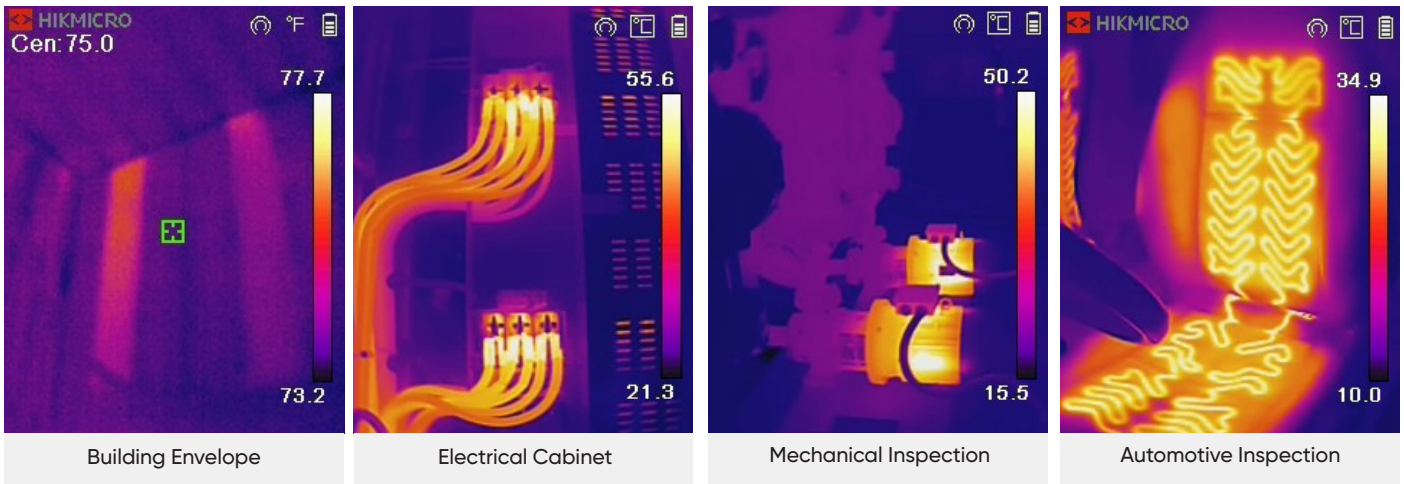

WHAT'S IN THE BOX

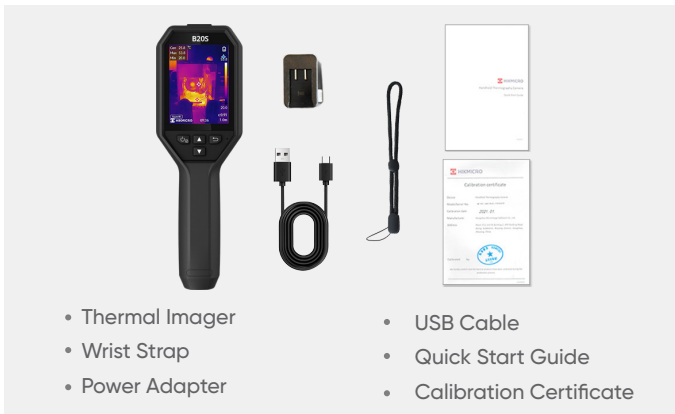

OPTIONAL ACCESSORIES

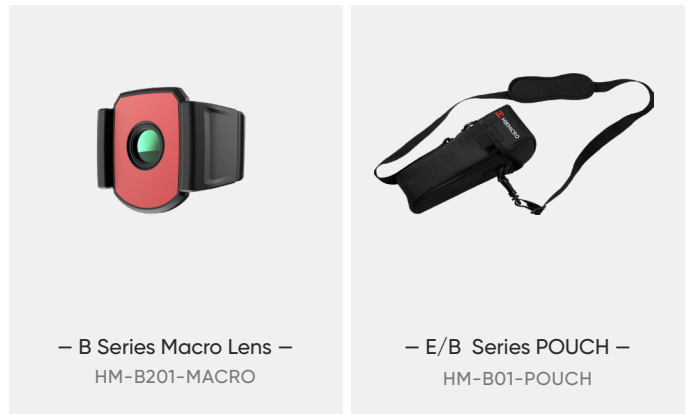

Camera Highlights		B11	B21L	B20	B20S
Infrared Image	IR Resolution	192 × 144 (27,648 pixels)	256 × 192 (49,152 pixels)		
	SuperIR	Yes, on Captured Thermal Images			Yes, on captured images and live view
	NETD	<0.04°C / NETD< 40mK			
	Image Frequency	25 Hz			
	Field of View (FOV)	27.8° × 37.2°	37.2° × 50.0°	37.2° × 50.0°	
	Focus Mode	Focus Free			
Image Display	Visual Camera	1600 × 1200 (2 MP)	N/A	1600 × 1200 (2 MP)	
	Image Modes	Thermal/Visual/PIP/Fusion	Thermal	Thermal/Visual/PIP/Fusion	
	Display	240 × 320 Resolution, 3.2"LCD Screen			480 × 640 Resolution, 3.2" LCD Screen
Measurement and Analysis	Object Temperature Range	-20 °C to 550 °C (-4°F to 1022°F)			
	Accuracy	Max (±2°C/3.6°F, ±2%), for the ambient temp. 15°C to 35 °C (59 °F to 95 °F) and object temp. above 0 °C (32°F)			
Data Storage and Communication	Storage Media	Built-in 16 GB flash memory			
	File Format	Radiometric JPEG			
	Storage Capacity	Up to 90,000 images			
General	Durability	2m (6.56 ft) drop test, IP54			
	Wi-Fi	802.11 b/g/n (2.4GHz)			
	Led Flashlight	Yes	N/A	Yes	
	Laser Pointer	N/A	Yes	N/A	
	Battery Operating Time	Approx. 6 hours			